

## 2753 Series Granger Conical Monocone Antennas

- **6:1 Bandwidth Permits Frequency Change without Antenna Tuning**
- **Up to 50 kW Peak Power Rating**
- **50 Ohm Input Provides 2.0:1 VSWR without Impedance transformers**
- **A Space Saving Antenna for Ground-to-Air and Shore-to-Ship Transmission**
- **Short, Medium, Long-Range Communications**



### General Description

The 2753 Conical Monopole Antenna Series replaced the 753C Conical Monopole Series, providing a number of improvements in specification.

All versions are the same configuration, differing only in size. The radiating structure is in the form of a cage supported by a central tower. The lower part of the antenna tower forms a compensating inductive stub in shunt with the feed terminals. This arrangement keeps the structure at dc ground potential, thereby eliminating the need for a base supporting insulator or for isolation of any required lighting circuit. The antenna is supplemented by a radial ground screen composed of soft drawn copper wire.

### Application

The 2753 Conical Monopole Antenna Series provides a cost-effective solution for the vertical omnidirectional antenna if the full bandwidth of the Monocone Type 1794 is not required.

Many applications are satisfied by the six to one frequency band of the monopole and its elevation plane characteristics. Such services include:

#### Ground Wave


- Shore-to-Ship 1.6-3.8 MHz
- Base station-to-mobile, short range

#### Skywave

- Medium to long-range ground-to-air
- Base station-to-outstations requiring medium to low angle
- Short-to-ship HF service
- Omni HF Broadcast including meteorological service.

### Accessories

The following accessories are available for ease of installation and maintenance: tower lighting kit, erection kit, paint kit, tool kit, lightning rod kit, anti-climbing kit and spares kit.

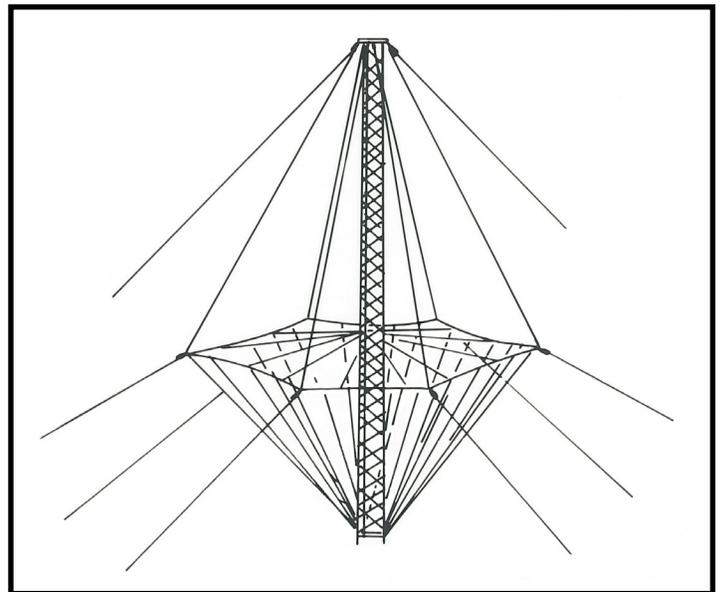

### Transportable

The 2753T-6, transportable version, follows the same electrical design as the fixed versions. Erected dimensions are similar. Materials are selected for their rugged nature and reuse in the field. The radiating curtain and ground screen are of stainless steel flexible wire; the mast is aluminum lattice of 17 inch face width; guy members are Terylene or Parafil; anchors are stakes of duckbilled type. VSWR measured in the field is typically within 2.0:1 (2.3:1 maximum). The antenna is complete with reusable packaging and erection tools.

# 2753 Series Conical Monopole

## Characteristics - 2753, Fixed Version


Peak Power Rating, kW Polarization VSWR Input Impedance, ohms	Up to 50 Vertical 2.0:1 nominal, 2.3:1 maximum 50, coaxial	
Input Connector (end seals available)  Directive Gain, dBi (over Perfect Ground) Azimuth Plane Radiation Pattern	Type N Jack (female) (-1K) 7/8" EIA flange (-2K) 1-5/8" EIA flange (-3K) 3-1/8" EIA flange (-4K) 5.0, nominal Omnidirectional $\pm 0.75$ dB	Receive or 1 kW avg./2 kW PEP 5 kW avg./10 kW PEP 10 kW avg./20 kW PEP 25 kW avg./50 kW PEP
Wind Survival Rating, mph (km/h) Without Ice With 0.5 in. (13 mm) radial Ice Tower Erection Kit	120 (190) 100 (160) A kit of simple erection tools is available for erection of antenna without the use of a crane	

## Characteristics - 2753T, Transportable Version

(same as Fixed version except as follows)

Frequency Range, MHz Input Connector	4.0 to 24.0 Type N Jack (female) (-1K) 7/8" EIA flange (-2K) 1-5/8" EIA flange (-3K)	Receive or 1 kW avg./2 kW PEP 5 kW avg./10 kW PEP 10 kW avg./20 kW PEP
Wind Survival Rating, mph (km/h) Without Ice With 0.5 in (13mm) Radial Ice	100 (160) 50 (80)	

## Elevation Plane Radiation Patterns (Relative to Isotropic)

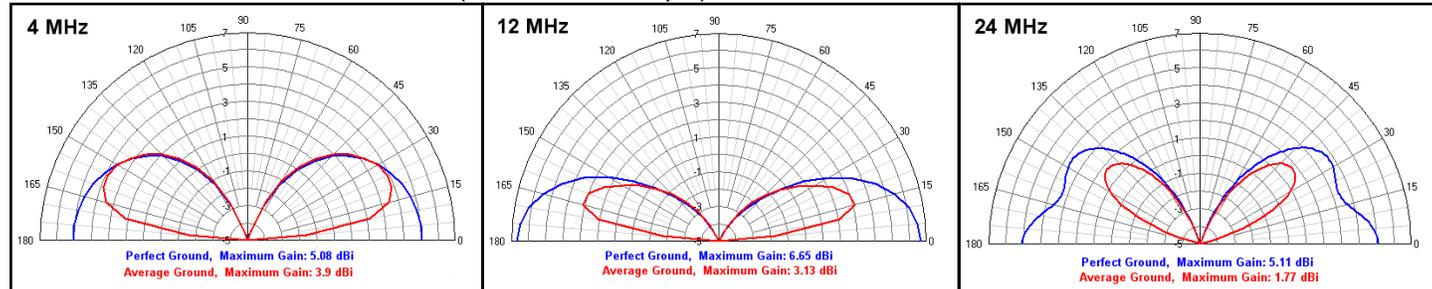

## Ordering Information

Type Number*	Frequency Range, MHz	Dimensions		
		Height, ft (m)	Ground Screen Diameter ft (m)	Outer Guy Radius ft (m)
2753-1-(* )	1.6-9.6	100 (30.5)	300 (91)	90 (27.5)
2753-2-(* )	2.0-12.0	80 (24.4)	240 (73)	61 (18.5)
2753-4-(* )	2.8-16.8	60 (18.3)	170 (52)	55 (16.7)
2753-6-(* )	4.0-24.0	40 (12.2)	120 (36)	35 (10.6)
2753T-6-(** )	4.0-24.0	40 (12.2)	120 (36)	35 (10.6)
2753-8-(* )	6.0-28.0	27.5 (8.4)	80 (24)	21 (6.5)

\* Complete part number requires addition of input connector suffix; -1K, -2K, -3K or -4K (see characteristics table)

\*\* Complete part number requires addition of input connector suffix; -1K, -2K or -3K (see characteristics table)

Kratos Defense & Security Solutions Inc.  
1120 Jupiter Road, Suite 102  
Plano, Texas, 75074  
USA  
Phone: 1 (214) 291-7654  
Fax: 1 (214) 291-7655  
www.KratosDefense.com  
Space@KratosDefense.com

### Bulletin 1531F 06/20

All designs, specifications and availabilities of products and services presented in this bulletin are subject to change without notice

© 2020 Kratos Defense